


11-SRT

COUNTER STACKER

with compensated stacking

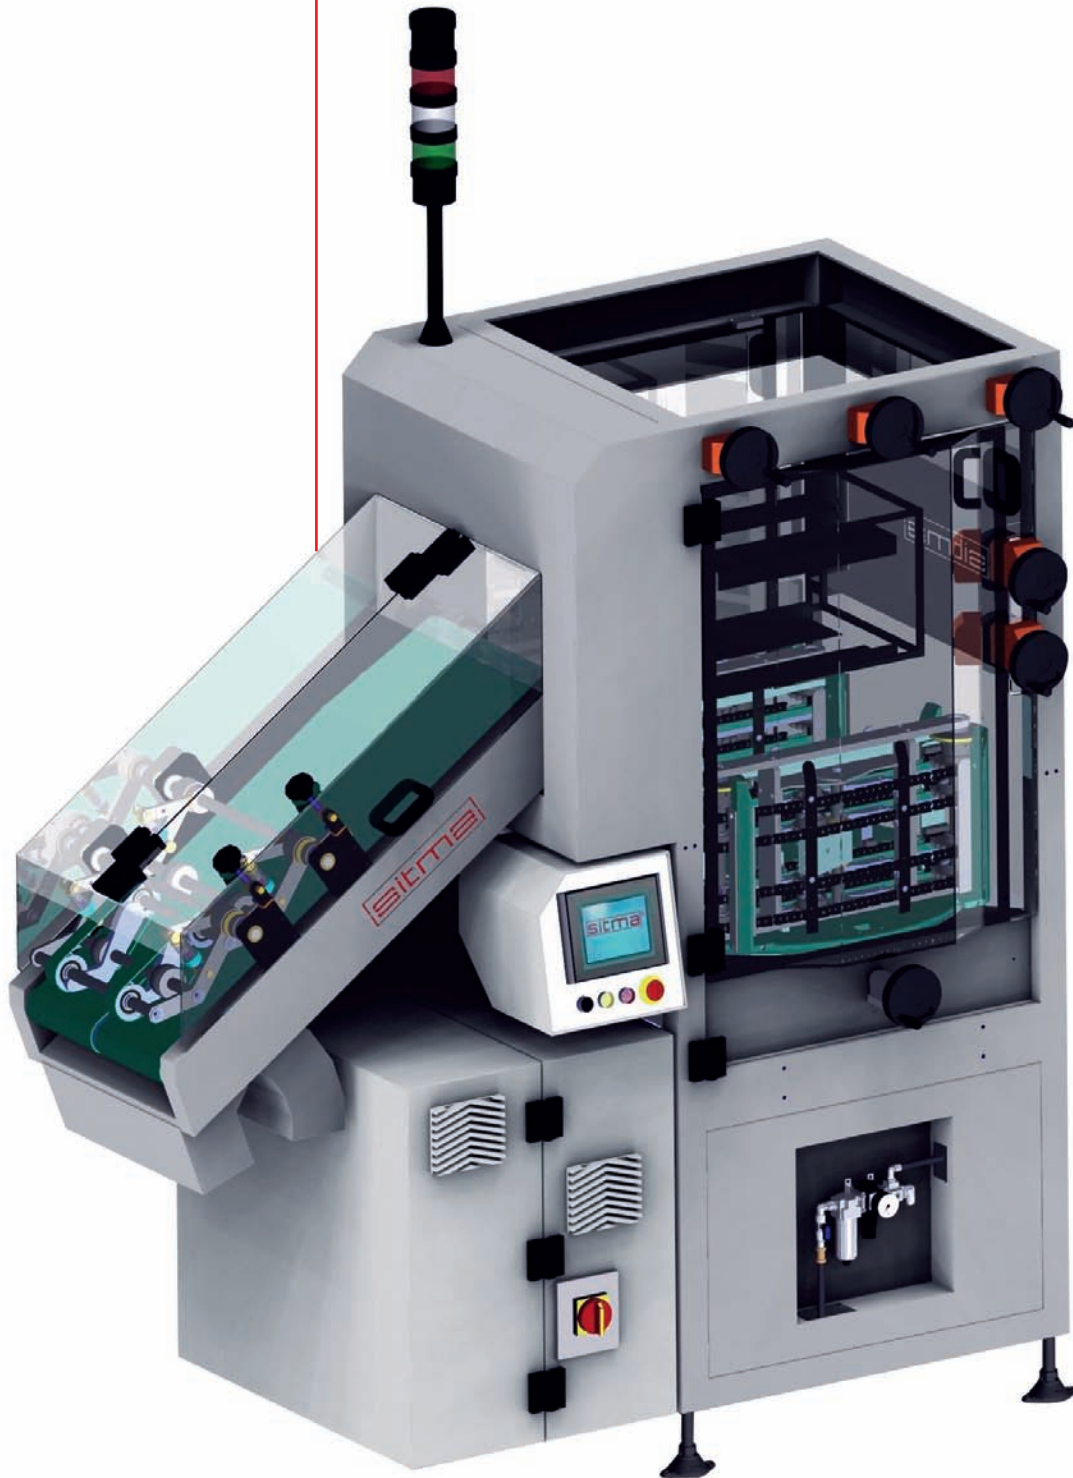

sitma[®]

Superior Engineering - Superior Quality - Superior Performance

11-SRT COUNTER STACKER


The new 11-SRT has been designed for a wide range of applications with stitched or perfect bound magazines, catalogues, mailing and newspapers.

Special dual vertical side pushers. This pusher design allows for the highest possible ejection speeds while maintaining excellent bundle integrity.

Operator interface with a touch screen panel for easy set-up of job parameters.

Features:

- Heavy duty design
- Minimal drop distance
- Extremely reliable
- Quick change over
- Stepper motor drop gate drive
- Minimal maintenance
- Caster mounted (on request)
- Automatic change over (on request)
- JDF compliance option

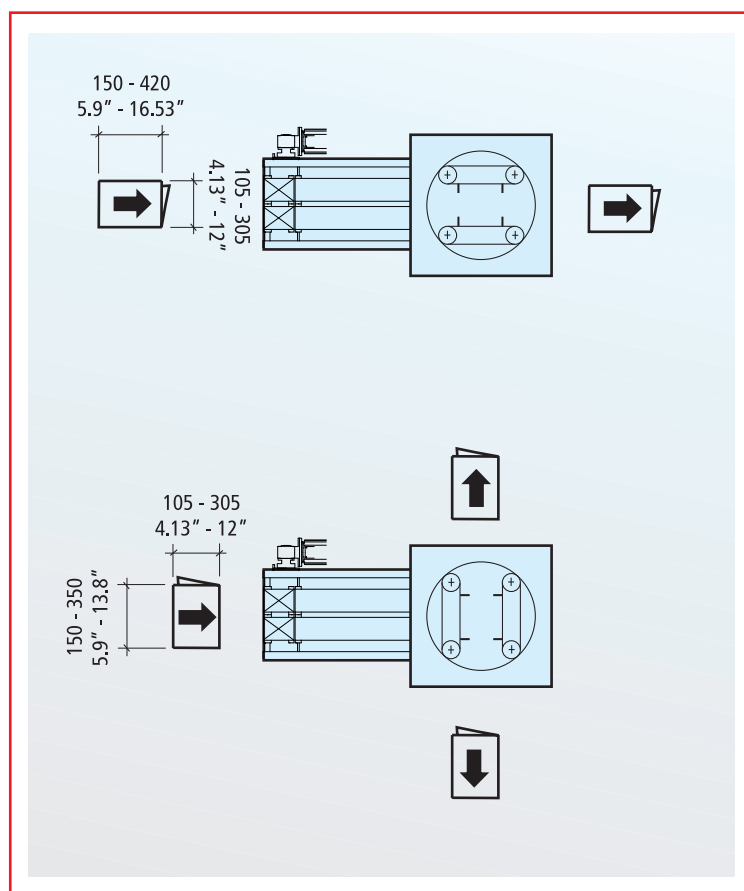

TECHNICAL DATA

Product Size	See Chart
Product Thickness:	1 - 20 mm (0.03" - 0.78")
Operating Speed:	Up to 15,000 pph
Total Stack Height:	up to 250 mm (9.84")
Infeed Height:	850 - 1150 mm (33.4" - 45.2")
Delivery Table Height:	Min. 850 mm (min. 33.4")
Discharge:	Right, left or straight out
Electrical:	3.4 Kw
Air Requirement:	200 L/min @ 6 bar
Weight:	750 kg

The above data are not binding



Sitma Machinery S.p.A.

Via Vignolese, 1927 - 1910
41057 Spilamberto (MO) Italy
Tel. +39 059 780 311 - Fax +39 059 780 300
sitma@sitma.it - www.sitma.com